




Duraslim LED Integrated Anti Corrosive Batten

- Cost effective alternative to fluorescent T8 & T5 fixtures
- Injection moulded polycarbonate
- Shatterproof
- Sealed construction
- Food safe fixture
- Tool free connection
- Quick and easy installation
- IP65
- 3 year guarantee³




Code	W	Description	lm	Temp	Hours
10250	36	36W Dura Slim LED Anti Corrosive Batten - Single 1200mm (4ft)	3500	4000	30000
10251	45	45W Dura Slim LED Anti Corrosive Batten - Single 1500mm (5ft)	4500	4000	30000
10252	60	60W Dura Slim LED Anti Corrosive Batten - Single 1800mm (6ft)	6000	4000	30000

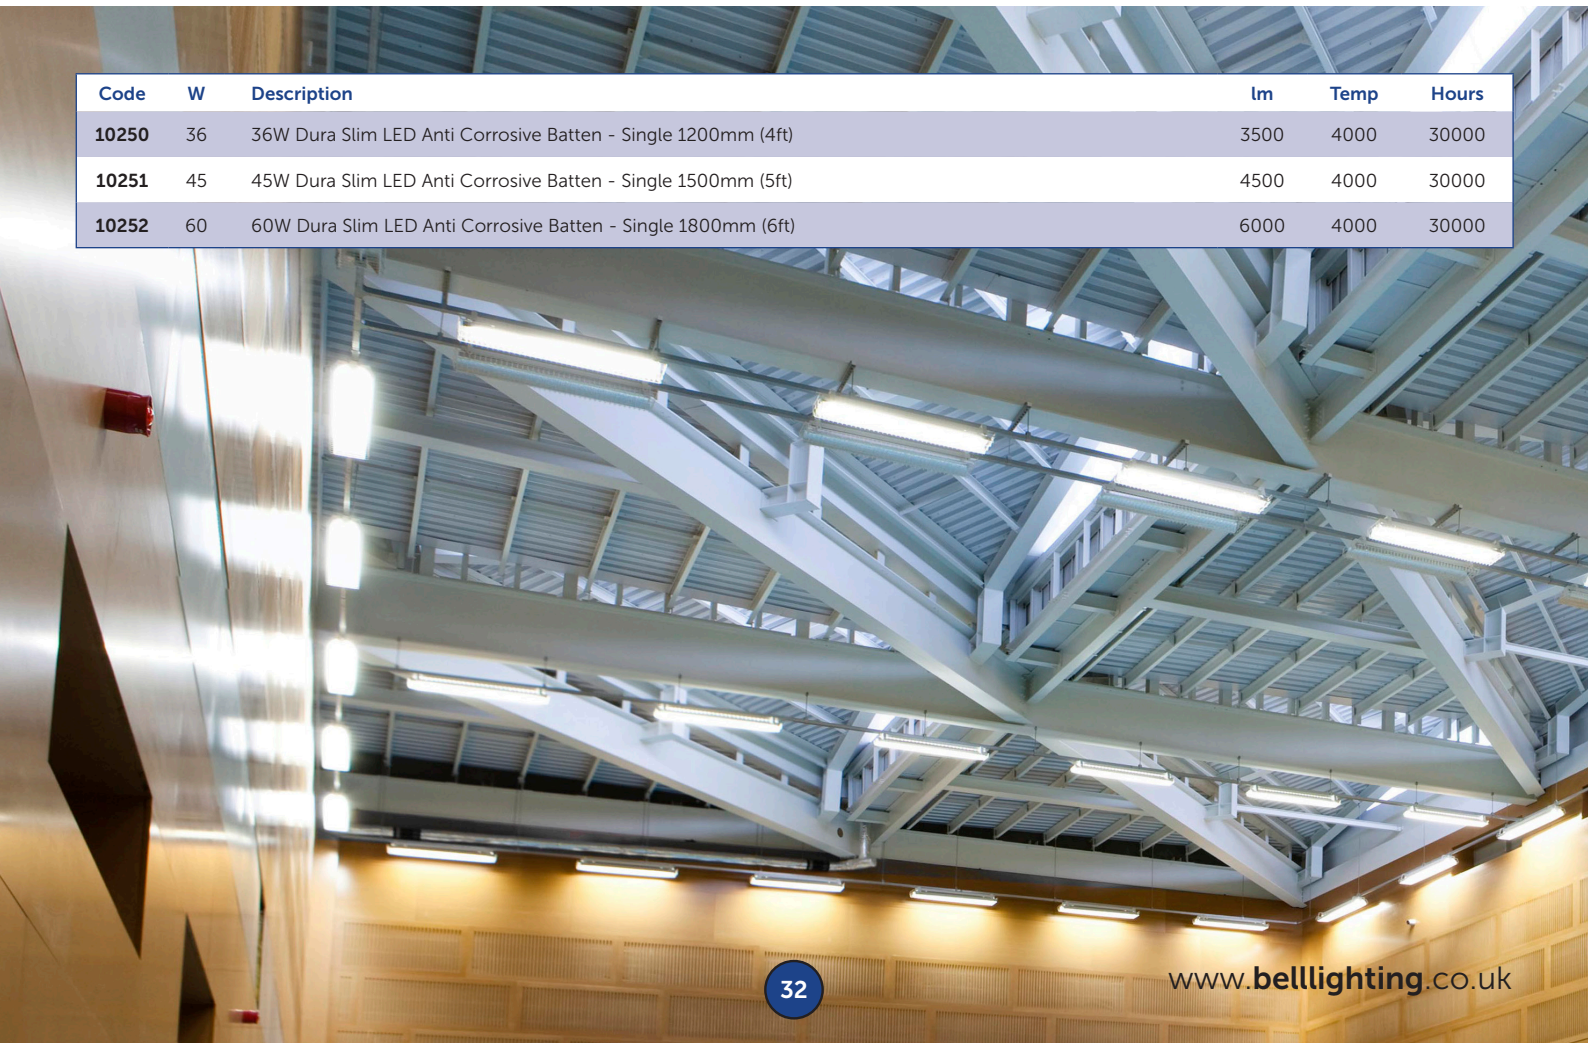




Technical Specification

Data	
Construction	Polycarbonate Body & lens
Driver	BELL
LED Chip	Samsung
IP Rating	IP65
Operating Temp	-30°C to +35°C / Emergency Version -10°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio
L1A / L1B / L2A / L2B Compliant	Yes



	A (mm)	B (mm)	C (mm)
36W 4' Batten	1230	53	35
45W 4' Batten	1510	53	35
60W 5' Batten	1810	53	35

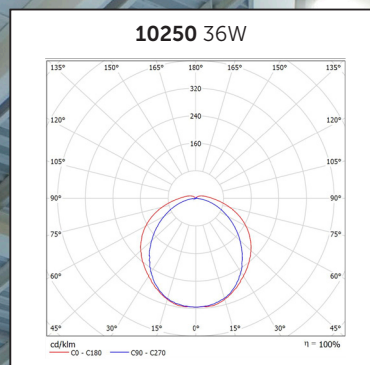

¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio
² Exceeds EU standard of RA 80 for Colour Rendering Index
³ Subject to terms & conditions (Contact Customer Service)